

Figure 1: One hardware system for indirect measurement method.

2025-01-06 10:54:00

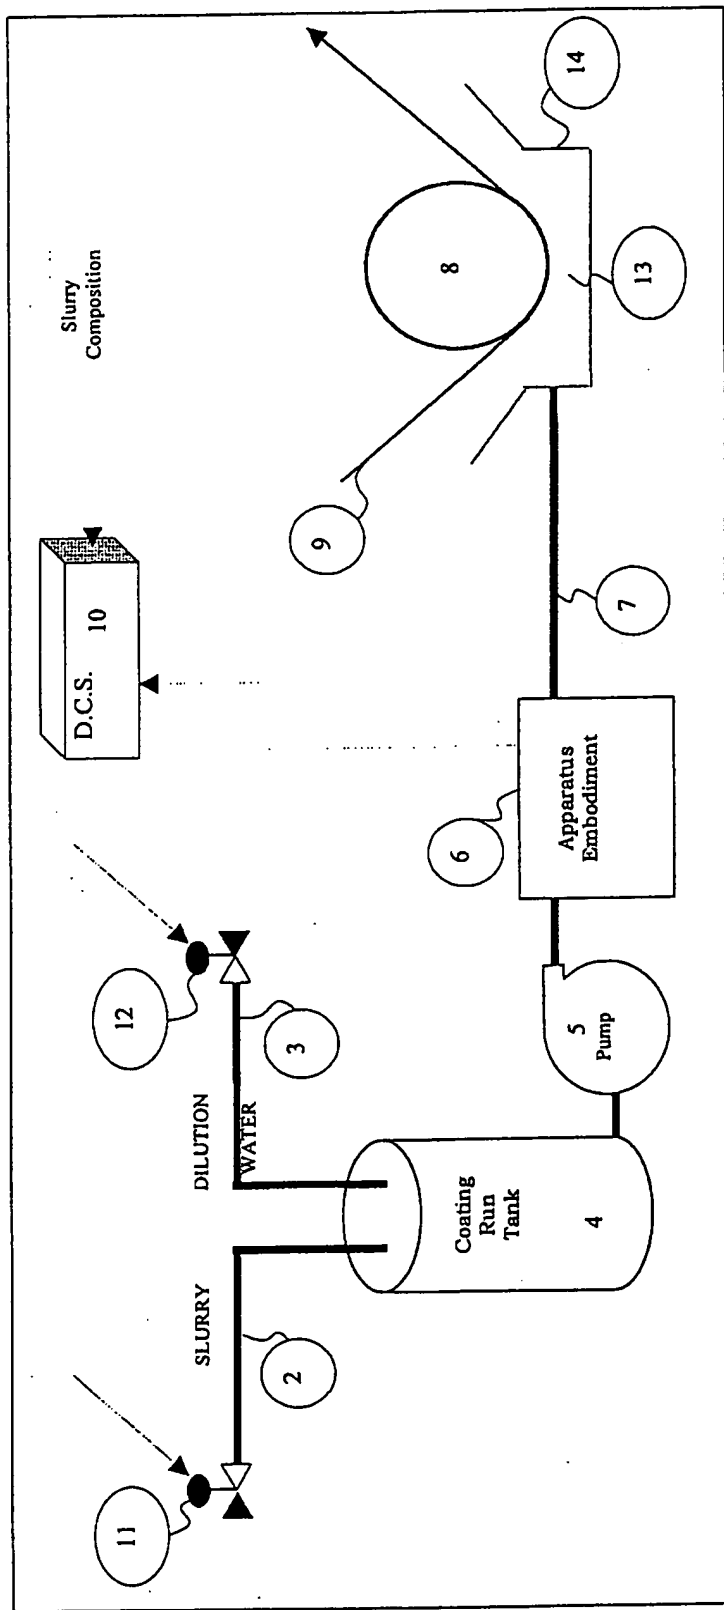


Figure 2: Coating Application system.

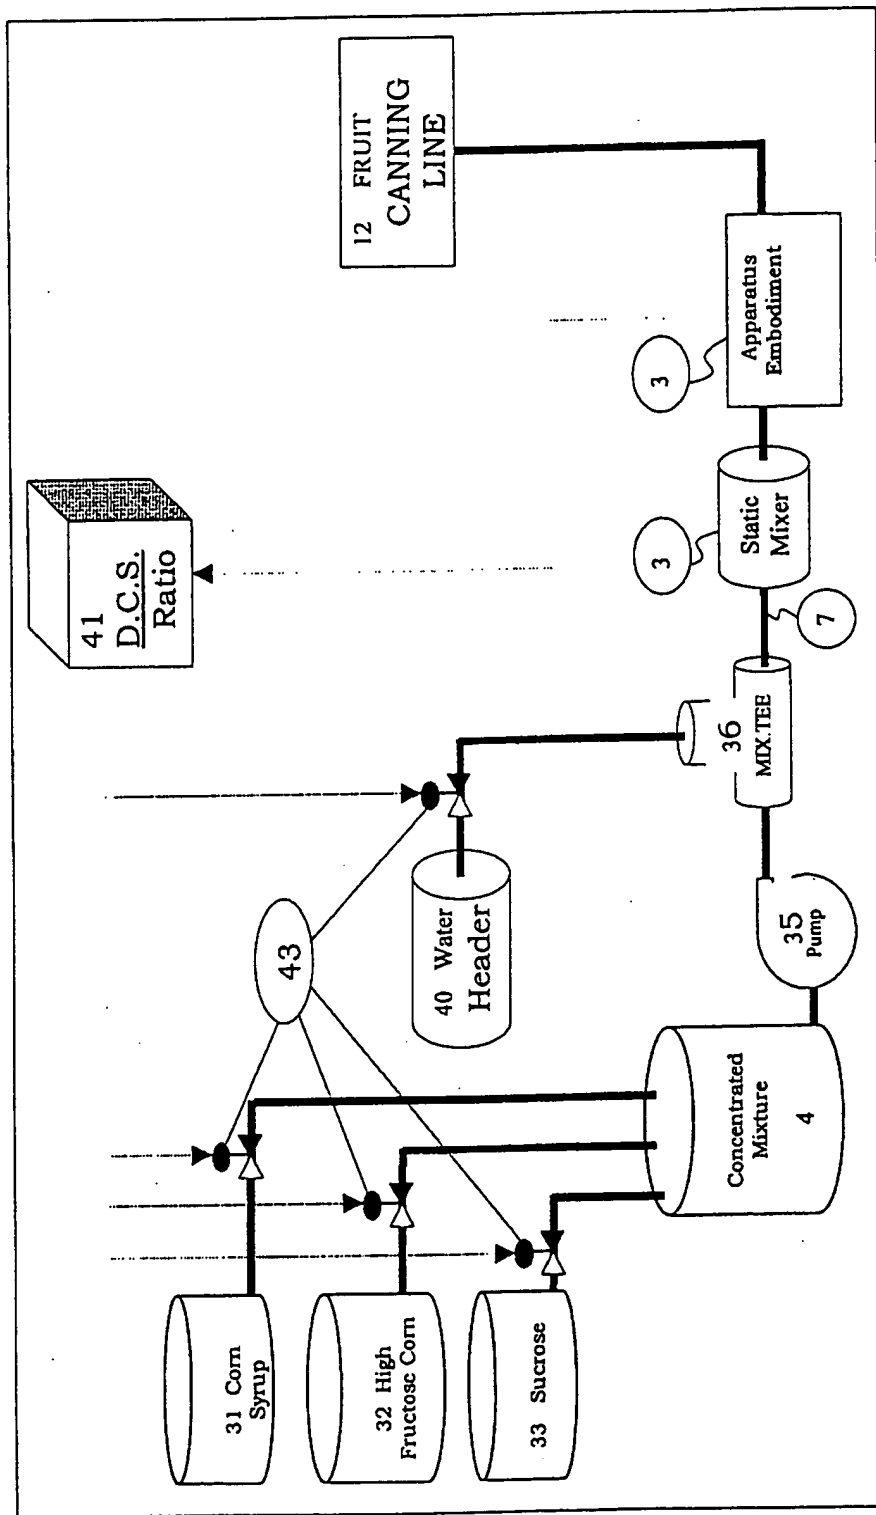


Figure 3: Application of system to a Fruit Canning line.

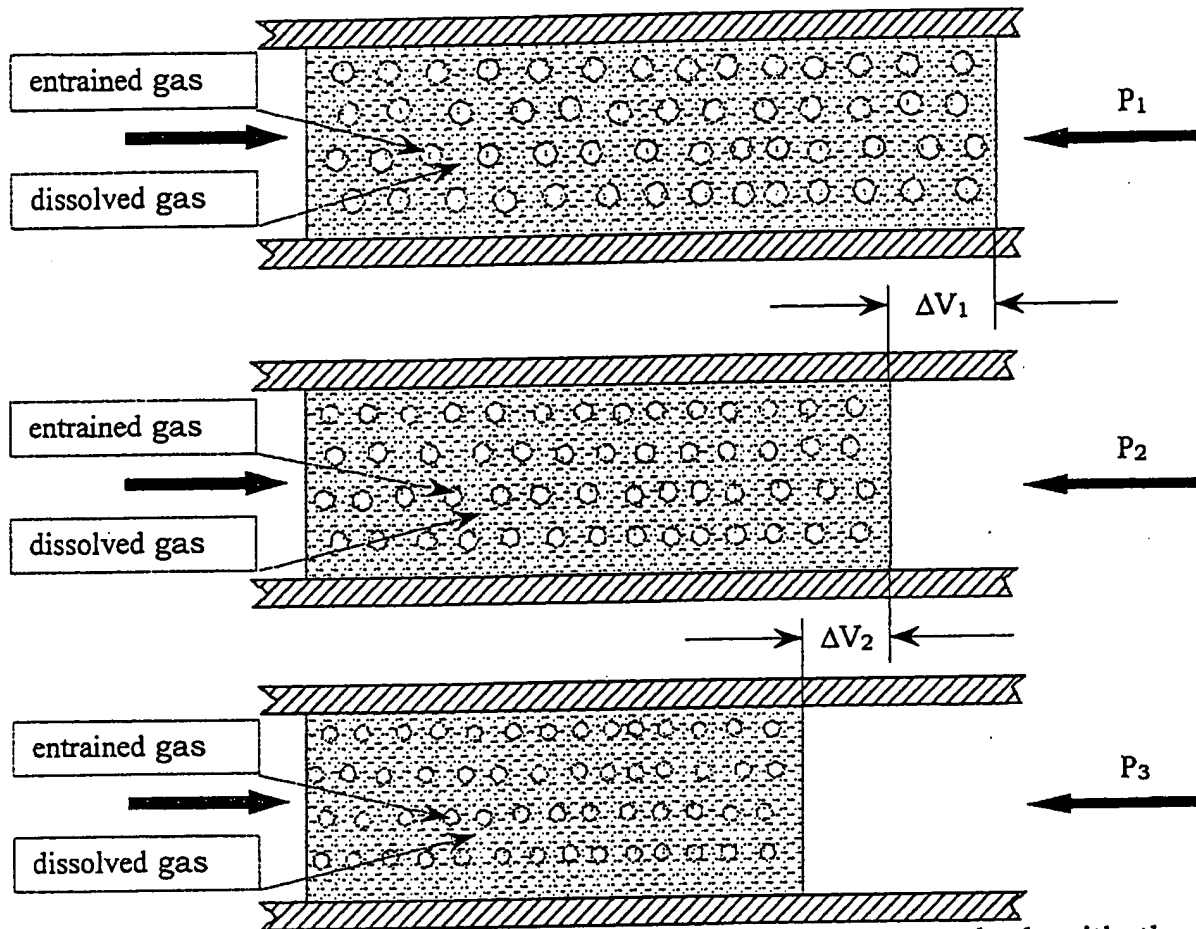


Figure 4: One hardware system for direct measurement method, with the measurement sequence being $P_1 > P_2 > P_3$, or $P_1 < P_2$ and $P_1 > P_3$, or any other feasible combinations

CURTAIN COATER

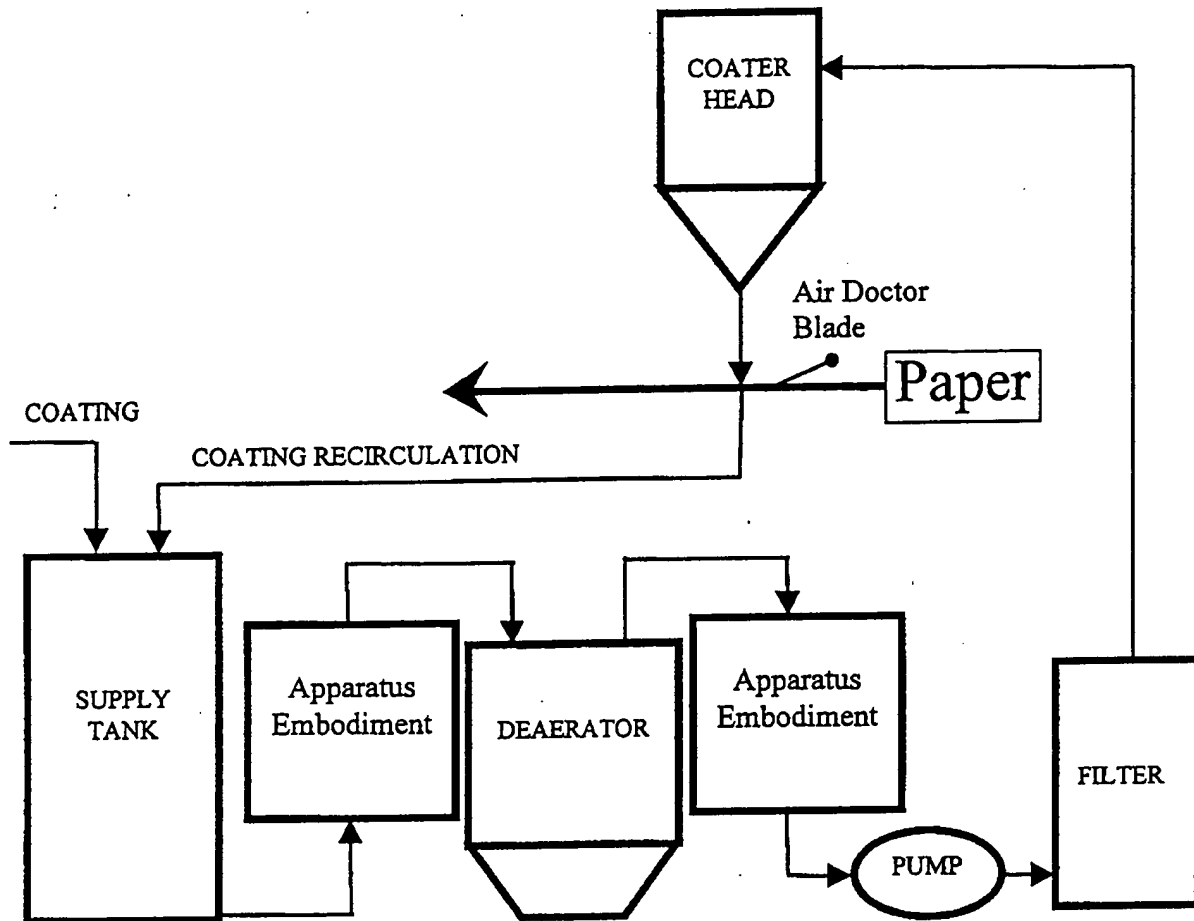


Figure 5: Curtain coater application with deaeration system.